




CORPORATION STOPS

PRODUCT DATA SHEET

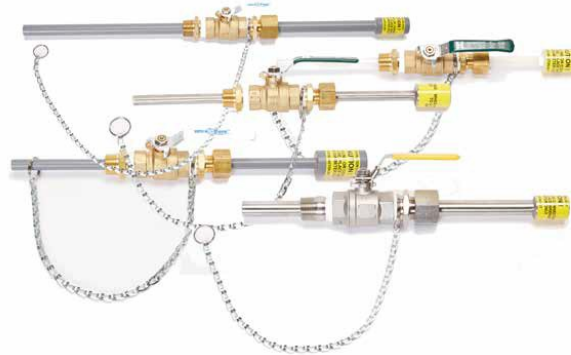

FEATURES:

- Longer quill lengths up to 24” are available upon request.
- Every corporation stop come with a safety chain to prevent the nozzle assembly from being completely withdrawn before the corporation stop is closed and is a safety feature to protect against back pressure.

Wetted Material (Quill)	PART NUMBERS with Brass Valve			Insertion Length		Temperature and Pressure Rating	
	Process Connection Size (MNPT)			½" & ¾"	1"	Max Temp	Max Press. (psi)
	½"	¾"	1"				
316 Stainless Steel	CS-050-316	CS-075-316	CS-100-316	8 ½"	7 5/8"	250°F (121°C)	150
CPVC	CS-050-PVC	CS-075-PVC	CS-100-PVC	8 ½"	7 5/8"	150°F (65°C)	125
Kynar	CS-050-KY	CS-075-KY	CS-100-KY	8 ½"	7 5/8"	200°F (93°C)	150
Alloy 20	CS-050-C20	CS-075-C20	CS-100-C20	8 ½"	7 5/8"	250°F (121°C)	150
Hastelloy C 276	CS-050-Hastelloy	CS-075-Hastelloy	CS-100-Hastelloy	8 ½"	7 5/8"	250°F (121°C)	150

For Corporation Stops with STAINLESS STEEL VALVES – Add **SS** to the end of the part number (example: CS-075-316-SS)

For Corporation Stops with **LEAD FREE** BRASS VALVES – Add **LF** to the end of the part number (example: CS-075-316-LF)

For PVC Corporation Stops with AWWA Threads – Add **AWWA** to the end of the part number (example: CS-075-PVC-AWWA)

CHECK VALVES ARE NOW AVAILABLE FOR ALL CORPORATION STOPS

Part Number	Description
CVPVC	½" PVC True Union Check Valve with Viton Seals
CVCPVC	½" CPVC True Union Check Valve with Viton Seals
CVKY	½" Kynar True Union Check Valve with Viton Seals
CVSS	½" Type 316 Stainless Steel Spring Loaded Check Valve
C276	½" Hastelloy Type C276 Spring Loaded Check Valve

To select a check valve please add the part number at the end of the corporation stop part number:

- Examples: CS-075-PVC-CVPVC
CS-075-316-SS-CVSS